SINCLAIR SUPPLY LTD.

Submittal Drawing 0120 STATIC FIRE DAMPERS

Company: **Contact:**

TYPE B

STANDARD CONSTRUCTION

FRAME
22 ga. Rollformed Steel frame

BLADES
22 ga. Interlocking Steel Blades
'Out of Air Stream'

FINISH
Mill

Fusible Link.
165 deg. F Standard

MAXIMUM SIZE
Single section -60" x 53" - Vertical and Horizontal

MULTIPLE SECTIONS ASSEMBLY
120" x 53" - Vertical and Horizontal

MINIMUM SIZE
4" x 3" - Vertical
4" x 5" - Horizontal

OPTIONS:
- ☐ Vertical Mount
- ☐ Horizontal Mount
- ☐ 165 deg. F. Fusible Link
- ☐ 212 deg. F. Fusible Link
- ☐ 304 Stainles Steel Construction

Horizontal & Vertical
U.L Classified
1-1/2 Hour Rating

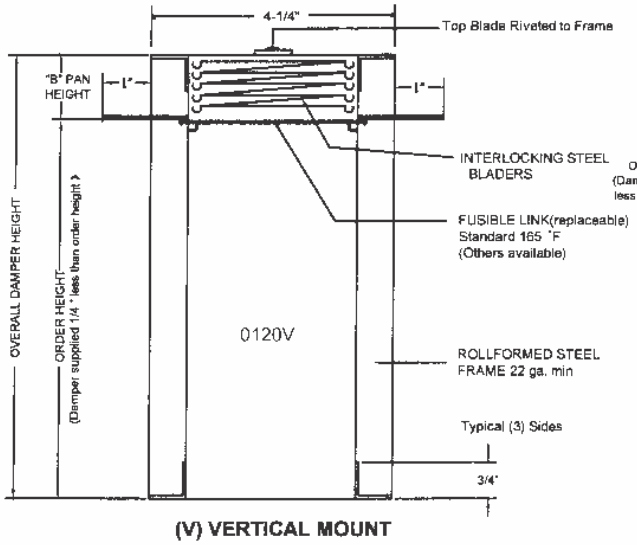

(V) VERTICAL MOUNT

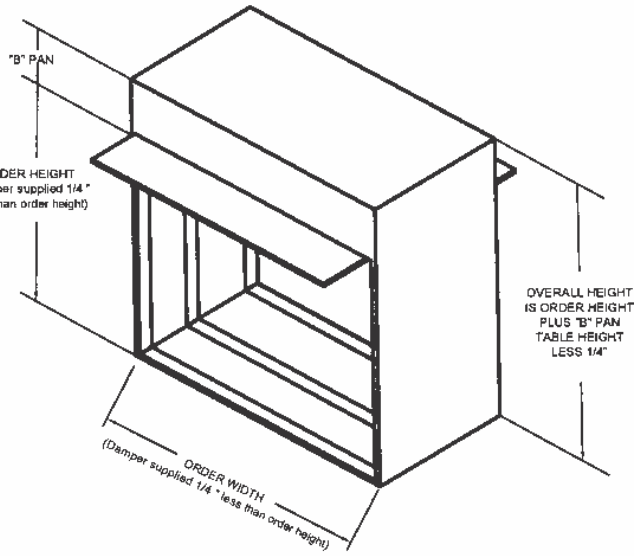

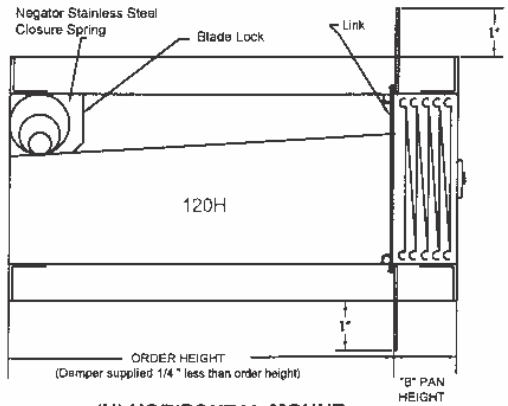

(H) HORIZONTAL MOUNT

HORIZONTAL MOUNTING SHOWN. VERTICAL MOUNTING SAME AS HORIZONTAL LESS STAINLESS STEEL NEGATOR SPRING AND BLADE LOCK

UNDERWRITERS LABORATORIES(UL555)
CLASSIFIED FIRE DAMPERS.
FIRE RESISTENCE RATED 1-1/2 HOUR.
FOR USE IN UL CLASSIFIED BUILDING MATERIALS RATED 2 HOURS OR LESS.

Qty	Width	Height	Mount	Fusible Link

Qty	Width	Height	Mount	Fusible Link